

BSUXVM00/2.0IP/NPR

2.0MP Starlight Network Box Camera




Camera	
Image Sensor	1/1.9" Progressive Scan CMOS
Min. illumination	Color:0.001Lux@(F1.2,AGC ON) ;B/W:0Lux@(IR LED ON)
Day & Night	ICR
Shutter Speed	1/5-1/20000
Auto Iris	YES
Wide Dynamic Range	dWDR
Digital Noise Reduction	2D/3D DNR
Focus	Support ABF
IMAGE	
Video Compression	H.265 / H.264 High / Main / Baseline Profile, MJPEG
Bit Rate (CBR/VBR)	Main Stream: 1080P: 500Kbps~12Mbps ;720P: 200Kbps~8Mbps Sub stream: 100Kbps~6Mbps
Audio Compression	G.711, RAW_PCM
Max. Resolution	1920*1080 @ 50 / 60fps
Streaming	Main Stream: 1920x1080 / 1280x720 Sub Stream: D1 to QVGA Third Stream: 1920x1080 / 1280x720 / D1 / VGA / 640X360 / CIF / QVGA
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness
HLC	YES
ROI	YES
9:16 Corridor Mode	YES
DIS	AUTO
Defog	YES
NETWORK	
Network Protocols	IPv4, 802.1x, HTTP, HTTPS, TCP/IP, UDP/IP, RTSP, DHCP, NTP, RTCP/RTP, PPPoE, SMTP, DNS, UPnP, FTP, ICMP, IGMP, Unicast and Multicast
Alarm Trigger	Perimeter / Single Virtual Fences / Double Virtual Fences / Loiter / Multi Loiter / Object Left / Object Removed / Abnormal Speed / Converse / Illegal Parking / Signal Bad / Motion Detection / Network Disconnect / Disk alarm / I/O alarm
RTSP Video	Standard RFC2326, Support QuickTime / VLC Player
Security	User security authentication, Reset, Hardware Watch Dog
System Compatibility	Onvif
INTERFACE	
Ethernet	1-ch Ethernet (10/100 Base-T) RJ-45 Connector
Microphone	Yes (Built-in)
Audio I/O	1ch Audio In,1ch Audio Out
Alarm I/O	1ch Alarm In,1ch Alarm Out
RS485	YES
BNC Output	YES
Reset Button	YES
On-board Storage	Micro SD/SDHC/SDXC slot supports Max up to 128GB
GENERAL	
Language	English, Chinese, Polish, Italian, Portuguese, Spanish, Russian, French, Czech
Power Supply	AC24V / DC12V / POE
Power Consumption	5W(MAX)
Operating Temperature	-20°C ~ 50°C (-4°F ~ 122°F)
Operating Humidity	0% - 90% RH
Product Dimensions	150.2mm x74.4mm x69.7mm
Product Weight	400g

Features

- 1/1.9" Progressive Scan CMOS Sensor
- Resolution: 1920X1080 @ 50/60fps
- H.265 Video Compression
- Low bitrate ,Excellent low light performance
- Triple Stream
- 3D DNR, dWDR, ICR, ROI, Defog, HLC, Corridor mode ,DIS
- Builtin Microphone, 1ch Audio In,1ch Audio Out, 1ch Alarm In,1ch Alarm Out
- Micro SD/SDHC/SDXC slot supports up to Max 128GB
- **Alarm:** Perimeter, Single Virtual Fences, Double Virtual Fences, Loiter, Multi Loiter, Object Left, Object Removed, Abnormal Speed ,Converse, Illegal Parking ,Signal Bad , Motion Detection, Network disconnect, Disk alarm, I/O alarm
- Metal Body

Dimensions

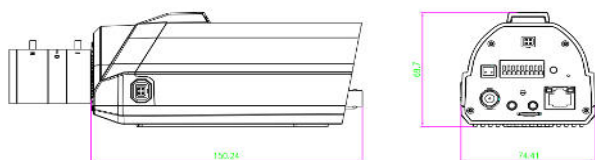

Product Specifications are subject to change without prior notice. The Images shown are only indicative, actual product may vary. Product features are tested under ideal conditions.

<http://www.bpl.in/>