

BSUBFM15/2.0IP/SUP


2MP Super Series Bullet Camera



Features

- 1/2.7" Progressive Scan CMOS Sensor
- Resolution: 1920x1080 @30 fps
- Low Bitrate Control
- 3.6mm Lens
- Smart LED, IR Distance upto 15 mtr
- Dual Stream
- 3D DNR, dWDR, ICR, HLC
- Support ROI, Corridor mode
- IP66, Metal Body

Dimensions

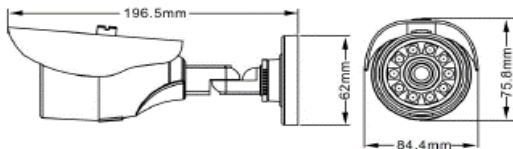

Camera	
Image Sensor	1/2.7" Progressive Scan CMOS
Min. illumination	Color 0.2Lux;IR ON 0 Lux
Day & Night	ICR
Shutter Speed	1/1-1/10000
Auto Iris	Fixed
Wide Dynamic Range	dWDR
Digital Noise Reduction	2D/3D DNR
Lens	
Lens	3.6 mm
Lens Type	Fixed
Angle of View	75°
IR LEDs	18pcs(SMD)
IR Distance	Up to 15 mtr
Image	
Video Compression	H.264 High/Main/Baseline Profile, MJPEG
Streaming Capability	Dual Streaming
Max.Resolution	1080P(1920x1080)
Video Betrate	Main stream: 500kb-12000kb Sub stream: 100kb-6000kb
Resolution	Stream 1: 1920x1080/1280x720 Stream 2: D1 to QVGA
Frame Rate	Mainstream : 25/30 fps Substream : 25/30 fps
Image Settings	Rotate Mode, Saturation, Brightness, Contrast, Sharpness
HLC	Available
Corridor mode	Available
Region of Interest (ROI)	Available
Network	
Alarm Detection	Motion Detection, Network Disconnect, Disk alarm
Protocols	HTTP, HTTPS, TCP/IP, UDP/IP, RTSP, DHCP, NTP, PPPoE, Unicast and Multicast supported.
User Permissions	User security authentication, Reset, Hardware WatchDog
System Compatibility	Onvif, CGI
Interface	
Communication Interface	1-ch Ethernet (10/100 Base-T) RJ-45 Connector
Reset Button	Available
General	
Language	English, Chinese,Polish, Italian, Portuguese, Spanish
Power Supply	DC 12V/POE
Power Consumption	2.5W(IR LED OFF); 5W(IR LED ON)
Operating Temperature	-10°C~+50°C
Operating Humidity	0% - 90% RH
Ingress Protection	IP 66
Dimensions	∅ 196.5*62mm
Weight	360g

Product Specifications are subject to change without prior notice. The Images shown are only indicative, actual product may vary. Product features are tested under ideal conditions.